FIVE BASIC MODELS WITH POWER AND HIGH FLOTATION

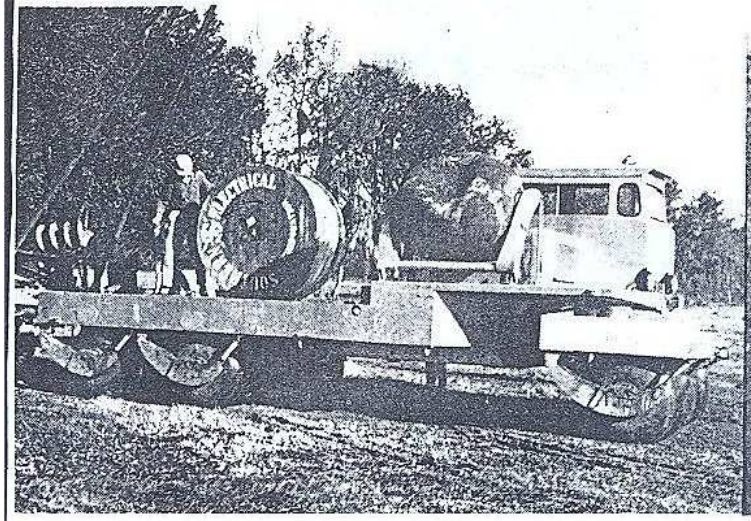

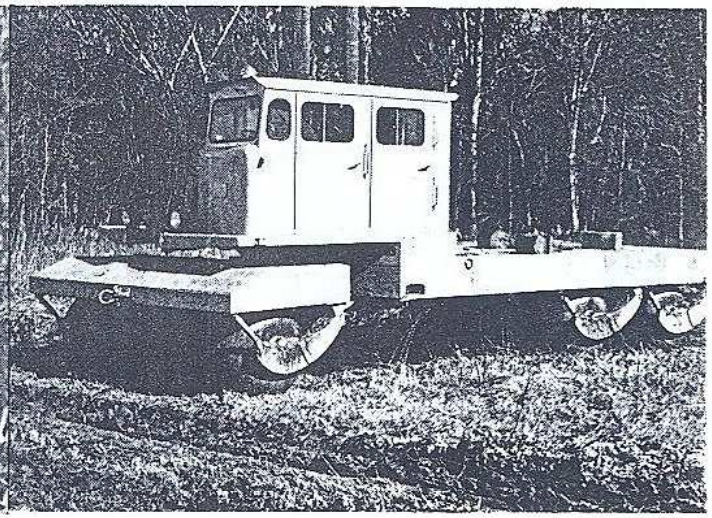

SIX BAG DRIVE TRANSPORTER MODEL 6650

PAYLOAD CAPACITY: 5 Tons. Additional load capacity can be provided with 2 and 4 bag trailers of 3 and 5 Ton capacities, pull type or powered. MAXIMUM SPEED: 30 M.P.H. STEERING: Full hydraulic power. OUTSIDE TURNING RADIUS: 42 Feet. TIRES: Six 40" x 50" Rolligon Bags, top roller loaded and driven. Each bag lays down a footprint of 700 square inches. Bags are individually pressure controlled from the cab. CURB WEIGHT: 9,000 lbs. G.V.W.; 19,000 lbs. CHASSIS: Welded aluminum alloy, integral frame. OVERALL WIDTH: 10 Feet. OVERALL LENGTH: 25 Feet. CARGO DECK: 10 Feet Wide, 14 Feet Long. ENGINE: Gasoline V-8, 185 H.P.; Diesel engine, optional. TRANSMISSION AND DRIVE: Five speed synchromesh with 2 speed front and rear drive transfer case.

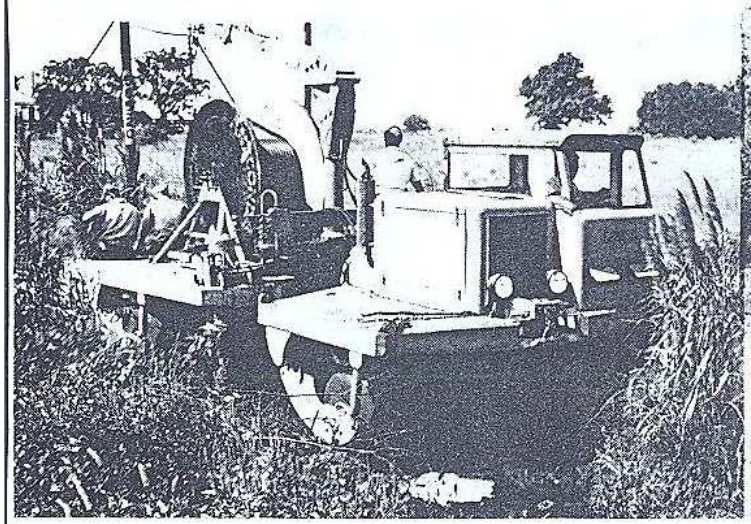

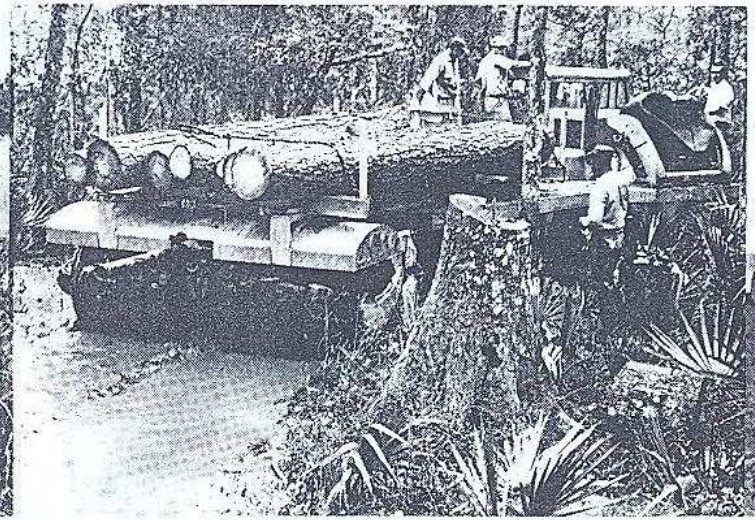

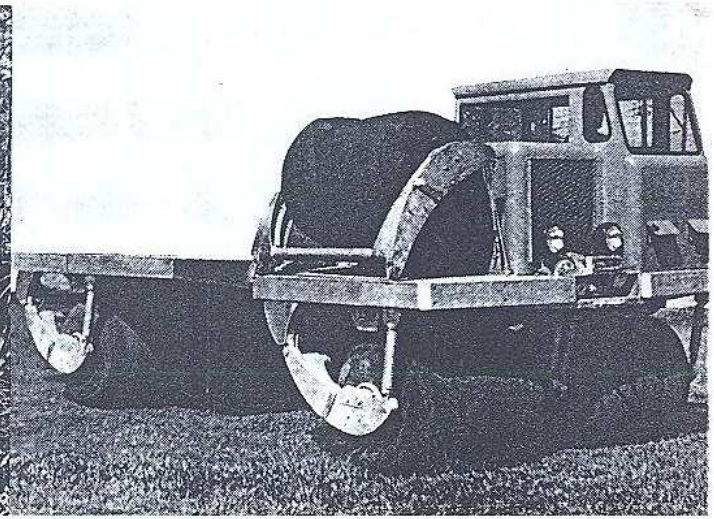

FOUR BAG DRIVE TRANSPORTER MODEL 4450

PAYLOAD CAPACITY: 3 Tons. Additional load capacity of 3 tons can be provided with a 2 bag trailer, pull type or powered. MAXIMUM SPEED: 30 M.P.H. OUTSIDE TURNING RADIUS: 27 Feet. TIRES: Four 40" x 50" Rolligon Bags, top roller loaded and driven. Each bag lays down a footprint of 700 square inches. Bags are individually pressure controlled from the cab. CURB WEIGHT: 6,500 lbs. G.V.W.: 13,000 lbs. CHASSIS: Welded aluminum alloy, articulated frame. OVERALL WIDTH: 10 Feet. OVERALL LENGTH: 20 Feet, 5 Inches. CARGO DECK: 10 Feet Wide

FOUR BAG DRIVE TRAVELER MODEL 4440

'AYLOAD CAPACITY: 2 Tons. Additional load capacity of 1½ tons can be provided with a 2 bag trailer, pull type or powered. MAXIMUM SPEED: 30 M.P.H. STEERING: Full Hydraulic power.)UTSIDE TURNING RADIUS: 22 Feet. TIRES: Four 30" x 40" Rolligon Bags, top roller loaded and driven. Each bag lays down a foorprint of 400 square inches. Bags are individually pressure ontrolled from the cab. CURB WEIGHT: 5,100 lbs. G.V.W.; 9,100 lbs. CHASSIS: Steel, electric welded, articulated frame. OVERALL WIDTH: 8 Feet. OVERALL LENGTH: 19 Feet, 7 Inches. :ARGO DECK: 8 Feet Wide, 10 Feet Long. ENGINE: Gasoline, 6 cylinder, 105 H.P.; Diesel engine, optional. TRANSMISSION AND DRIVE: 3 Speed synchromesh transmission with 2 speed front nd rear drive transfer case.

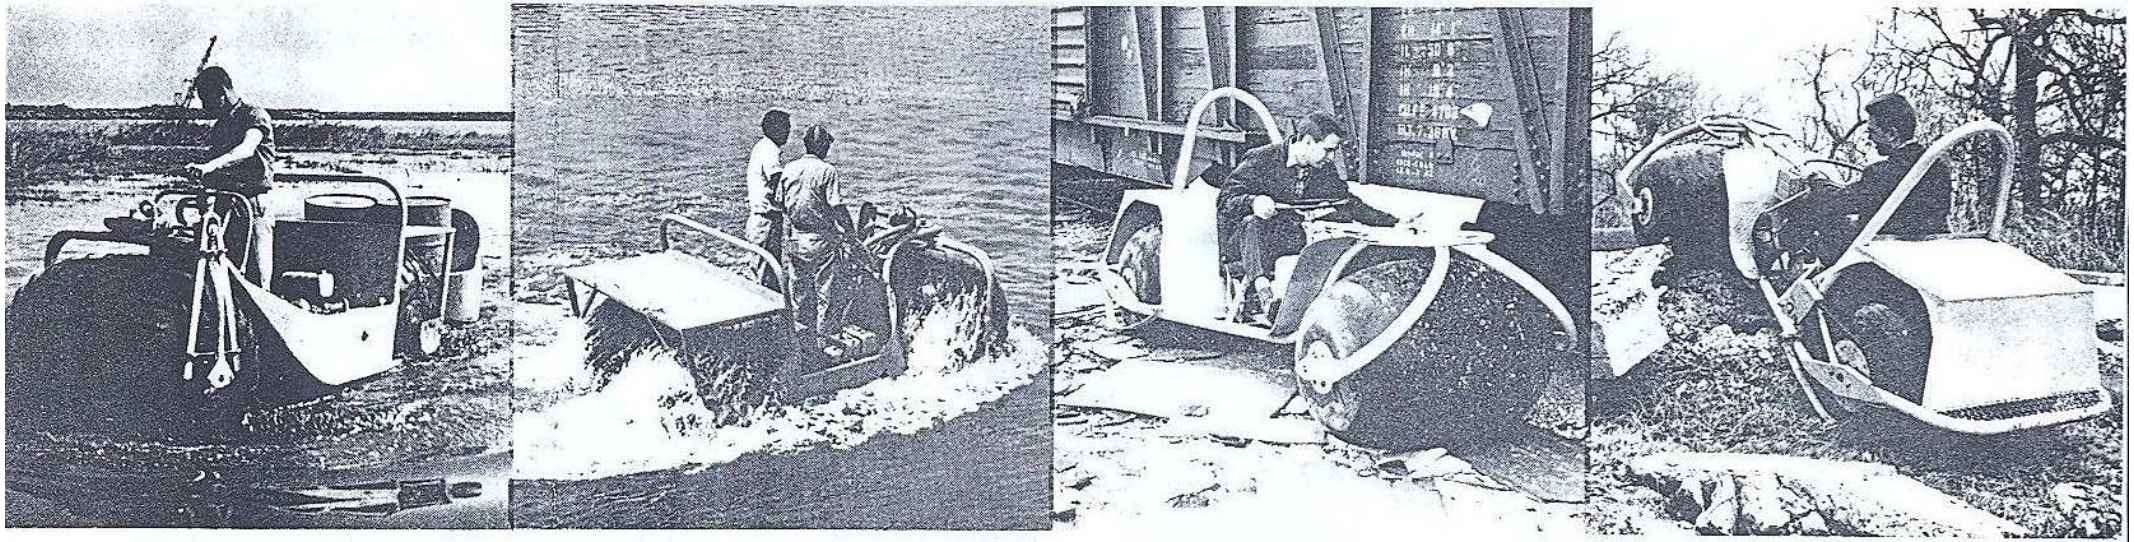

TWO BAG DRIVE MODEL 2250

\YLOAD CAPACITY: Up to 1000 lbs. or 5 men, depending upon terrain. One and two bag ilers available, pull type or powered. SPEED: 10 to 20 M.P.H. on land; 3 M.P.H. in water. EERING: Full hydraulic power. OUTSIDE TURNING RADIUS: 15 Feet. TIRES: Two " x 50" Rolligon Bags with cleats, Axle loaded and chain driven. Each bag lays down a ıtprint of 700 square inches. ENGINE: Air cooled gasoline, 18 HP. TRANSMISSION: drostatic, Two speed, forward and reverse.

S. Patent Nos. R.E. 24,272 & 2,990,026.

ONE BAG DRIVE MODEL 2140

PAYLOAD CAPACITY: Up to 500 lbs. or 3 men. SPEED: 10 to 20 M.P.H. STEERING: Manual. OUTSIDE TURNING RADIUS: 13 Feet. TIRES: Two 30" x 40" Rolligon Bags, Axle loaded. Rear wheel chain driven, front wheel drive, optional. Each bag lays down a footprint of 400 square inches. OVERALL WIDTH: 3 Feet, 9 Inches. ENGINE: Air cooled gasoline, 6 HP. TRANSMISSION: Automatic, forward and reverse.

1602 OLD SPANISH TRAIL, P. O. BOX 20096, HOUSTON, TEXAS 77025

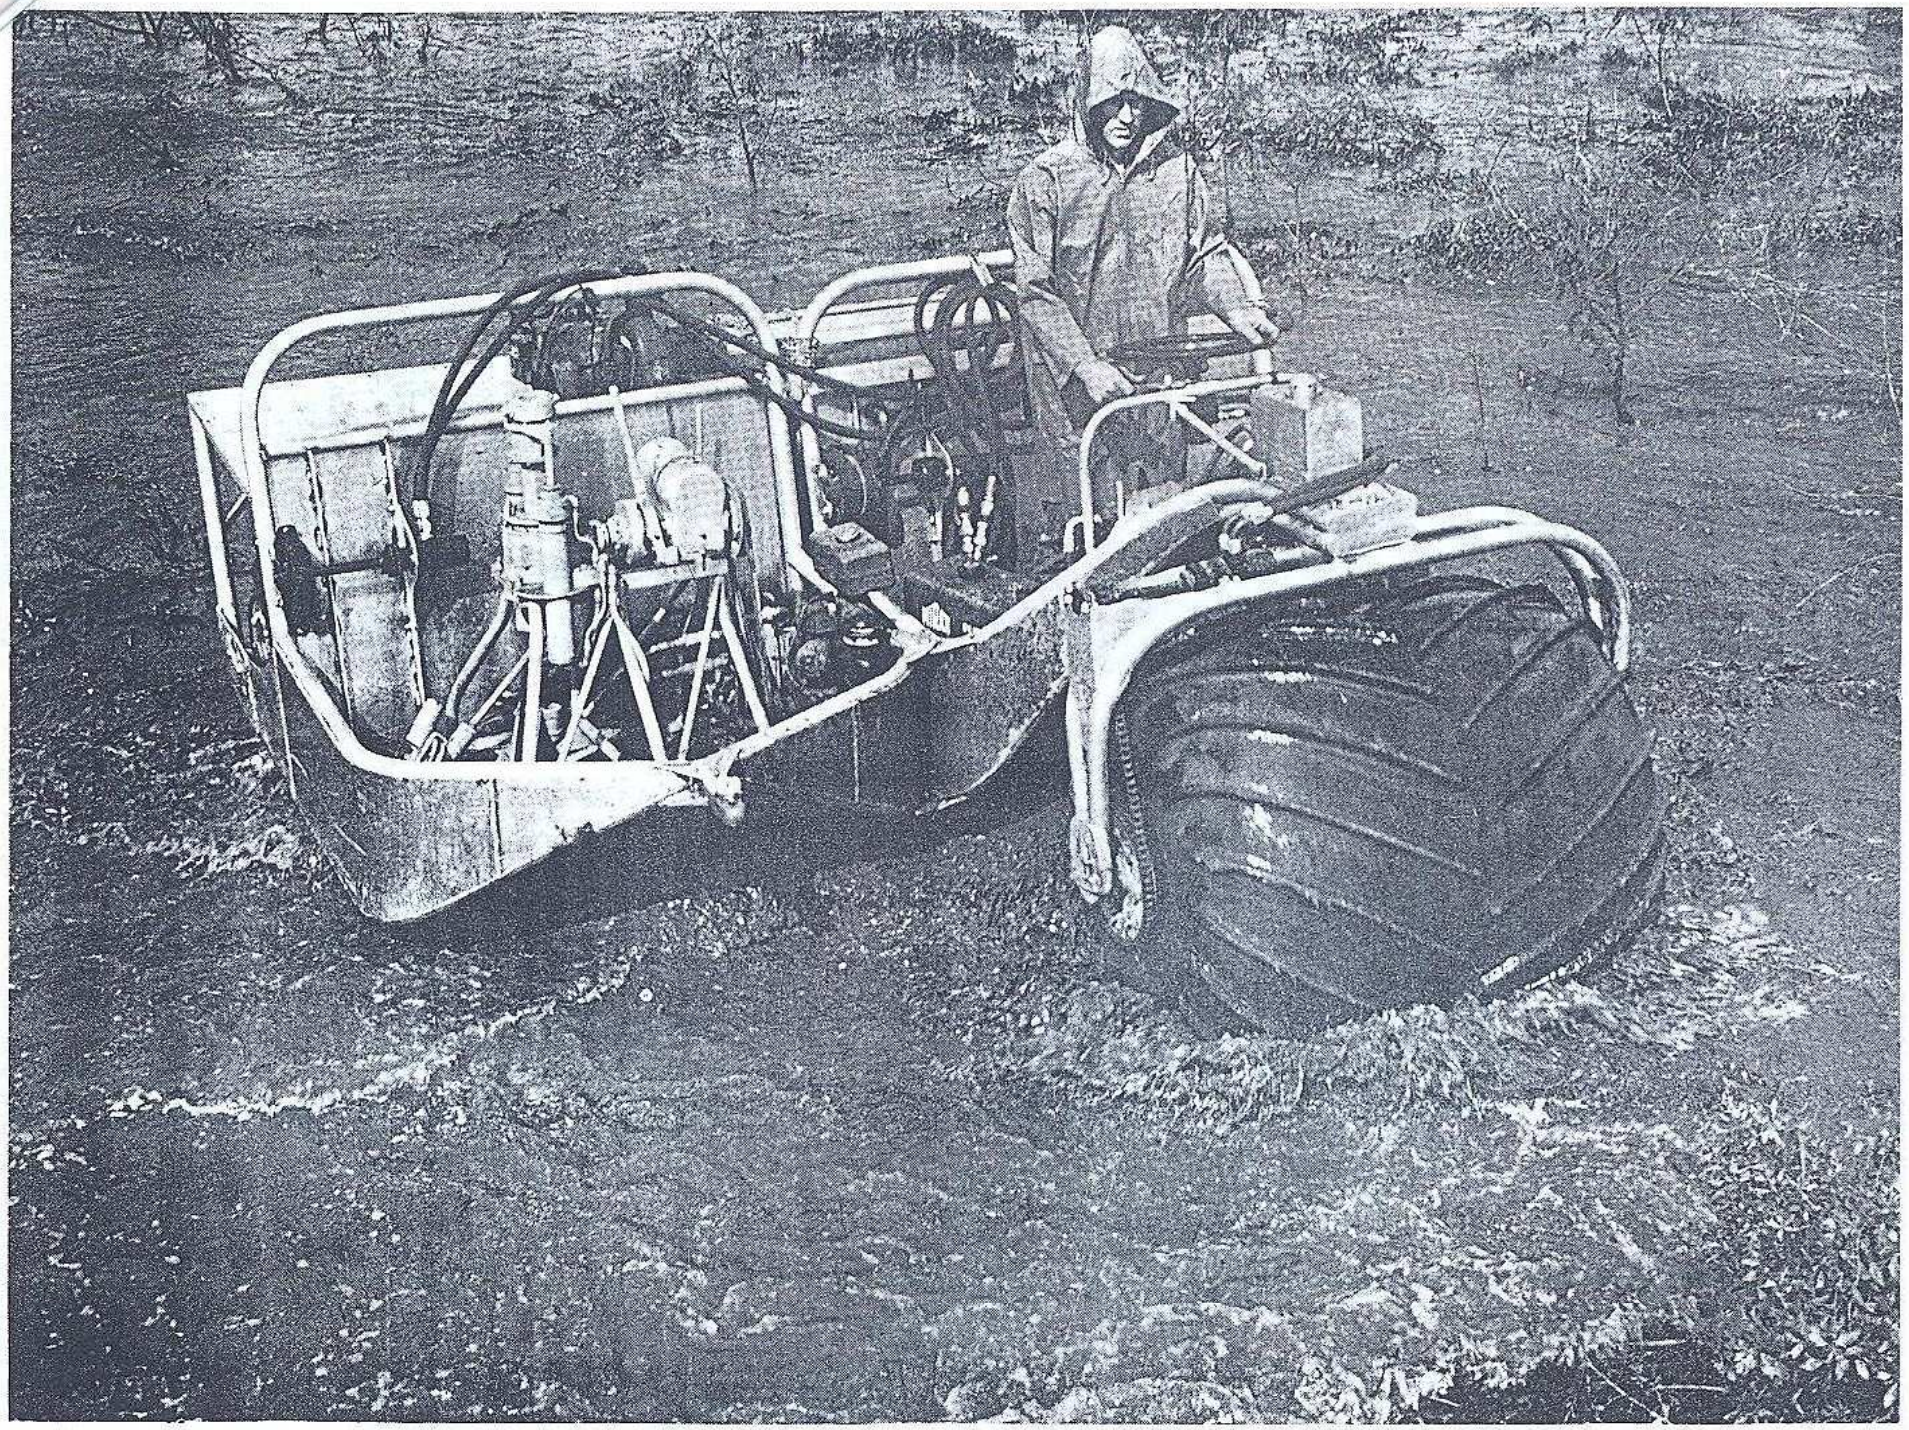

ROLLIGON MODEL 2251 WITH WERED SIDECAR ATTACHMENT