


THIS IS ROLLIGON



BILL W. ROBINSON
SALES MANAGER

Telex 790515

10635 BRIGHTON L
STAFFORD, TE
(HOUSTON SUBI

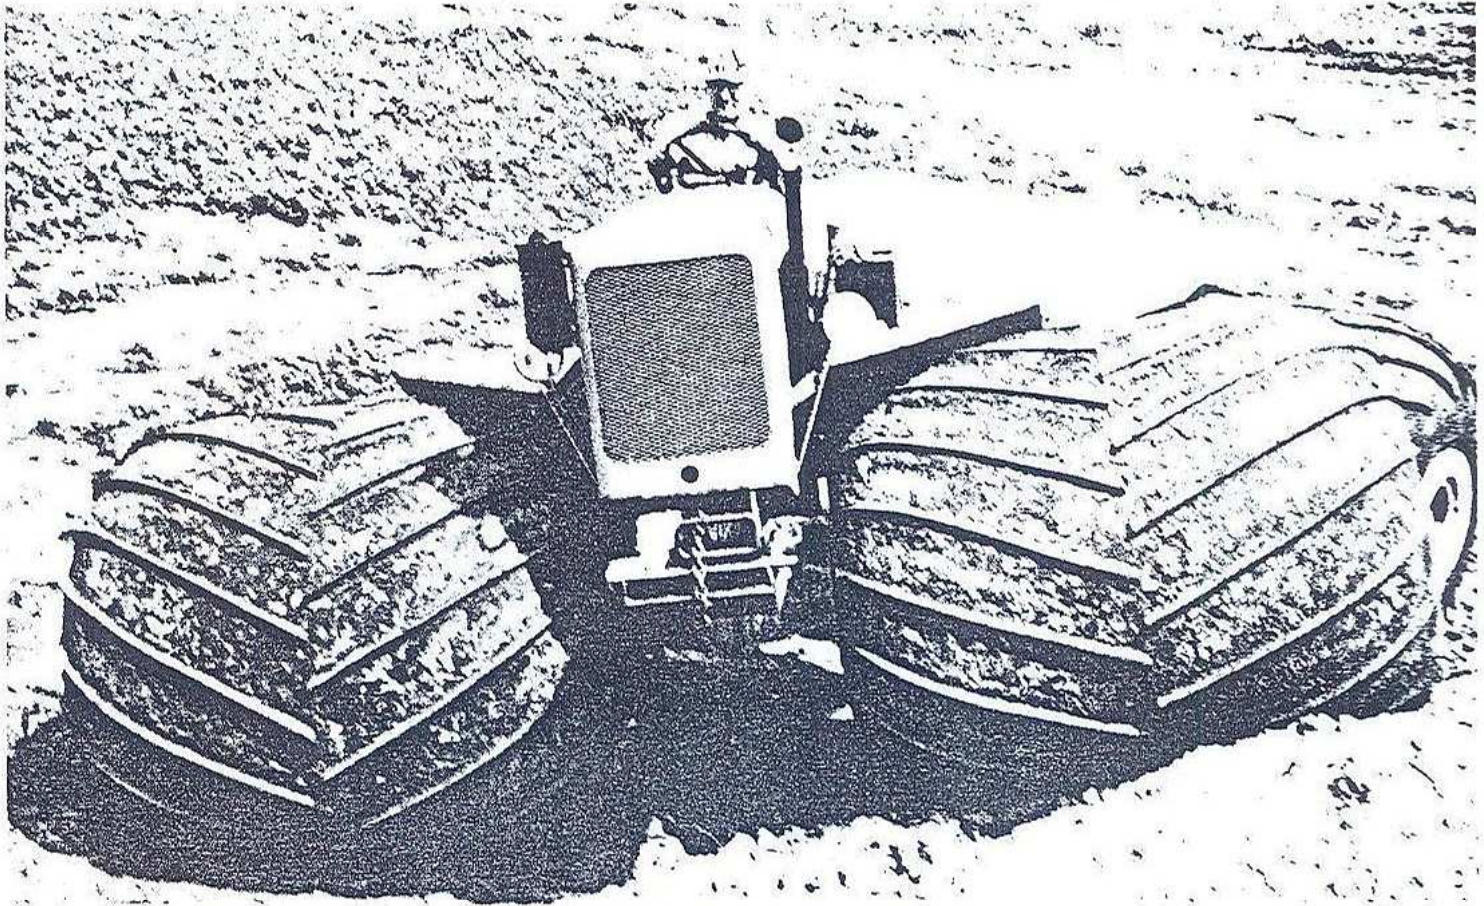

MODEL 4460

PUT A ROLLIGON ON YOUR JOB — SEE HOW IT — — —

Saves fuel
Saves time

Increases profits
Keeps the EPA away

Increases your job capabilities

ROLLIGONS ARE HAULING

Pipeline welders
Line pipe
River weights
Drilling mud
Drilling supplies
Surveyors
Railroad inspectors
Personnel

Seismic equipment
Core drills
Cable layers
Pole setters
Mixed concrete
Mosquito sprayers
Weed sprayers
Cut turf

Dredge pipe
Dredge supplies
Dragline supplies
Fuel
Rescue equipment
Ranch supplies
Farm equipment
Ore





ROLLIGON

MODEL 4460^o

PERFORMANCE

Rolligon's Stafford, Texas Mfg. Plant

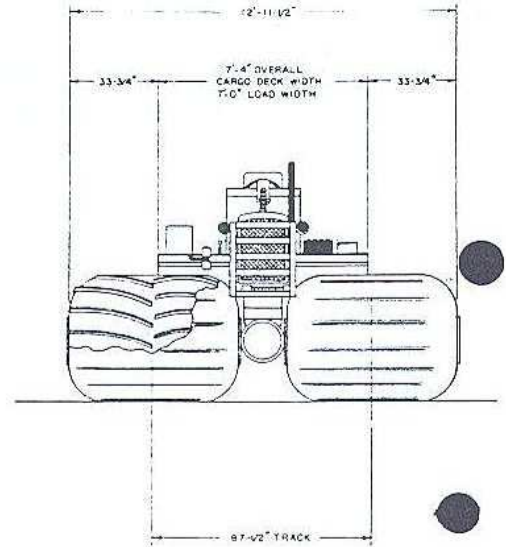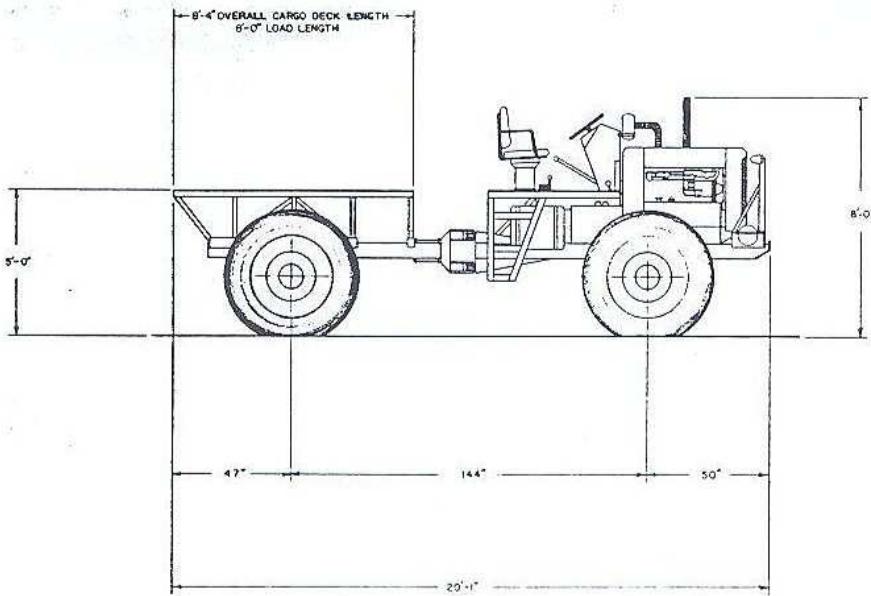

Maximum Payload on Land	10,000 lbs.
Maximum GVW in Water	19,000 lbs.
Recommended Maximum Operating GVW in water	12,500 lbs.
Vehicle Weight, no payload, no operator, no fuel	7,500 lbs.
Minimum Ground Clearance at Pivot	25 inches
Maximum Forward Gradeability	60%
Maximum Side Gradeability	45%
Maximum Angle of Approach	60 degrees
Maximum Angle of Departure	80 degrees
Maximum Forward Speed	24 MPH on land
Minimum Turning Radius	22 feet